

HSRF 3560



Order Example (주문예)

HSRF 3560	1200L	A+B	3SETS
Type	Length	Brackets	Q'ty


→ stat. R

lowest recommended bending radius for static (fixed) installation.



→ dyn. R

lowest recommended bending radius for dynamic (flexible) installation.

star.R	dyn.R	A1	A2	B1	B2
60	150	28	36	53	61

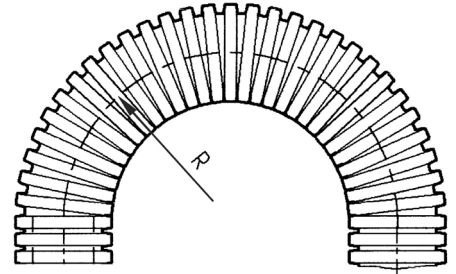

RoboFlex

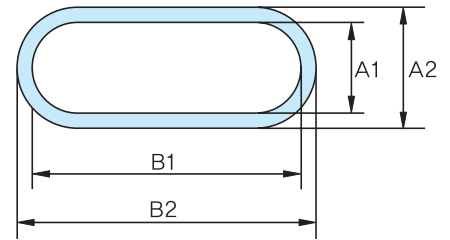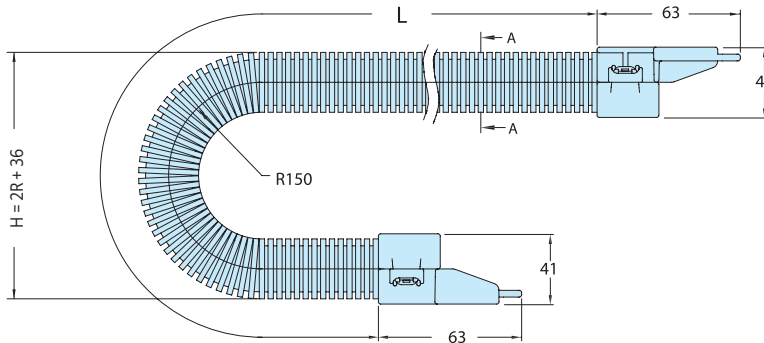

Brackets

